


Your Inspirations.
Our Innovations.



PRT7008L Portable 4G LTE AC WiFi Hotspot

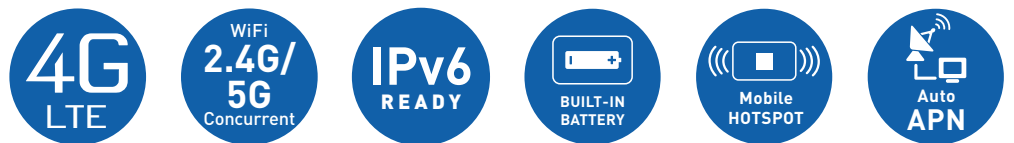


The PROLINK® PRT7008L is a Portable 4G LTE AC WiFi Hotspot that allows high speed data transfers of up to 300Mbps and multiple user sharing of up to 32 users or devices all at the same time.

Its concurrent dual-band technology allows you to utilise both the 2.4GHz and the faster 5GHz frequency bands for data transfer, making streaming and downloading enjoyable and pleasurable.

The device also comes with a built-in rechargeable battery that allows users to stay connected for up to 11 hours on a single charge, even there is no power point nearby.

Aside from that, there is also a convenient OLED screen that displays the available battery life, the connection status, the network name and signal strength, whereby users can easily manage and track their network connection without any hassle.

PRT7008L is an ideal portable device for frequent travellers who need a fast-speed, compact and light-weight device to be used and carried anywhere.

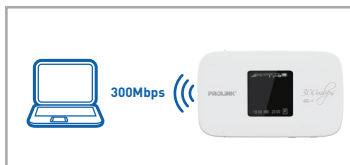

High-Speed Mobile Internet Access

- Maximum data transmission rate up to 300Mbps.



Portability and Mobility

- Compact and light-weight design allows users to carry it around.
- Rechargeable battery which supports up to 11 hours on a single charge, for users to stay connected to the internet even there is no power point nearby.




Multi-mode and Multi-user

- Support both Wi-Fi and USB Internet connection for convenient sharing of your network with other users.

Specifications

WiFi	2.400 - 2.4835GHz / 5.180 - 5.825GHz Frequency Band; IEEE802.11ac/a/b/g/n ; WPS supported
Receiver Band	LTE TDD: 2300MHz (Band 40) LTE FDD: 2100MHz (Band 1) / 1800MHz (Band 3) / 850MHz (Band 5) / 2600MHz (Band 7) / 900MHz (Band 8) / 700MHz (Band 28) UMTS: 2100MHz (Band 1) / 1900MHz (Band2) / 900MHz (Band 8) GSM/ GPRS/ EDGE: 850/ 900/ 1800/ 1900MHz
Data Rate	LTE FDD (Cat6): DL 300Mbps, UL 50Mbps; LTE TDD (Cat6): DL 220Mbps, UL 10+Mbps;
Antenna	Internal / External (optional)
Interface	On/Off button, Function button, Reset button, Micro-USB port (for charging), SIM card slot, 2 x RF connectors (for external antenna)
LCD Display	3G/4G Signal Strength, Roam Status, WiFi Connected Users, Battery Status, WAN Connection Mode and Status, SPN, WiFi Signal Strength
Battery	Capacity: 2300mAh Li-Ion Battery; Working time: up to 11 hours; Standby: up to 500 hours; Charging mode: USB cable / power adapter (optional)
Environment	Operating temperature: -10 to 60°C; Storage temperature: -20 to 70°C; Battery temperature: 0 to 45°C (charging mode); Humidity: 5% ~ 95%
Dimension	109 x 65 x 14.05mm (L x W x H)
Weight	101.5g (with battery)

HOW DOES IT WORK?

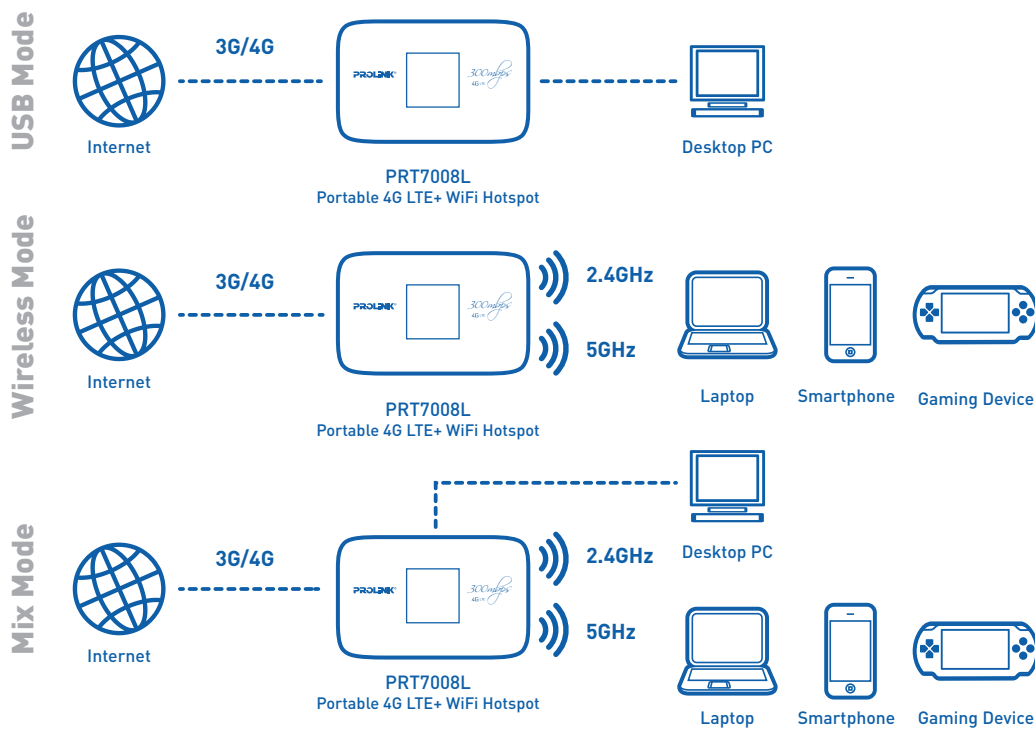

Authorised Distributor/ Reseller:

Find us on Facebook

<http://www.facebook.com/global.prolink>

Compatible with:



System Requirements:

Windows XP/Vista/7/8/8.1, Mac, Linux, Android 2.2 & above, iOS 4.3.3 & above
*Support for Intel-based Mac only

PROLINK® is a trademark of Fida International (S) Pte Ltd and is manufactured under its authority. Microsoft®, Windows®, Windows® 98SE/ME/2000/XP/Vista/7/8 are either registered trademarks or trademarks of Microsoft Corporation. Mac and the Mac logo are trademarks of Apple, Inc., registered in the U.S. and other countries. Linux® is a registered trademark of Linus Torvalds and Linux penguin "Tux" created by Larry Ewing and The Gimp. All other brands, products, services, logos and company names mentioned herein are trademarks of their respective owners. All specifications, designs and contents are subjected to changes without prior notice. Images are for demonstration and may vary from actual products. © Copyright 2016. PROLINK® All rights reserved.

