


PROLINK®

www.prolink2u.com

Your Inspirations.
Our Innovations.




PRT7011L Portable 4G LTE WiFi Hotspot



The **PROLINK® PRT7011L** Portable 4G LTE Wi-Fi Hotspot provides high speed data transfer of up to 150Mbps and Wi-Fi sharing of up to 10 users or devices concurrently.

The device also comes with a built-in rechargeable battery that allows you to stay connected for up to 10 hours on a single charge, even there is no power point nearby. Aside from that, the device comes with 3 LED lights on its front panel which displays a clear indication of the current battery status, Wi-Fi strength and 4G signal strength at a glance.

The **PROLINK® PRT7011L** is an ideal portable WiFi device for frequent travelers who need a fast-speed, compact and light-weight device to be used and carried anywhere.

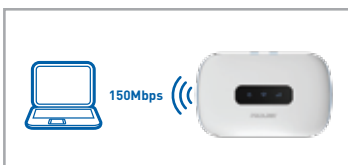

Hi-Speed Mobile Internet Access

- Data transmission rate of up to 150Mbps.




Multi-user Sharing

- Share your wireless connection with up to 10 users/ devices simultaneously.



Portability and Mobility

- Compact and light-weight design allows users to carry it around.
- Rechargeable battery supports up to 10 hours on a single charge, for you to stay connected to the internet even there is no power point nearby.

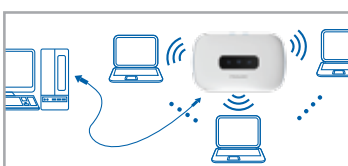


Multi-mode

- Support for both Wi-Fi and USB Internet connection for convenient sharing of your Internet connection with other network users.

Specifications

WiFi	2.400 – 2.4835GHz Frequency Band; IEEE802.11b/g/n; WPS supported; Output Power: 20dBm (max)
Receiver Band	LTE TDD: 2300MHz (Band 40) LTE FDD: 900MHz (Band 8)/ 850MHz (Band 5)/ 1800MHz (Band 3)/ 2100MHz (Band 1) UMTS: 900MHz (Band 8)/ 850MHz (Band 5)/ 2100MHz (Band 1) GSM/ GPRS/ EDGE: 850/ 900/ 1800/ 1900MHz
Data Rate	LTE FDD (Cat4): DL 150Mbps, UL 50Mbps LTE TDD (Cat4): DL 112Mbps, UL 10Mbps 3G HSPA+: DL 42Mbps, UL 5.76Mbps (DC supported)
Antenna	Internal
Interface	On/Off button, WPS button, Reset button, micro-SD card slot, SIM card slot, micro-USB port
LED	Battery indicator, WiFi indicator, Network indicator
Battery	Capacity: 2000mAh Li-Ion Battery; Working Time: up to 10 hours; Charging Mode: USB cable / power adapter (optional)
Environment	Operating Temperature: 0°C to 35°C; Storage Temperature: -20 to 60°C;
Dimension	106 x 65 x 16mm (L x W x H)
Weight	103g (with battery)

HOW DOES IT WORK?

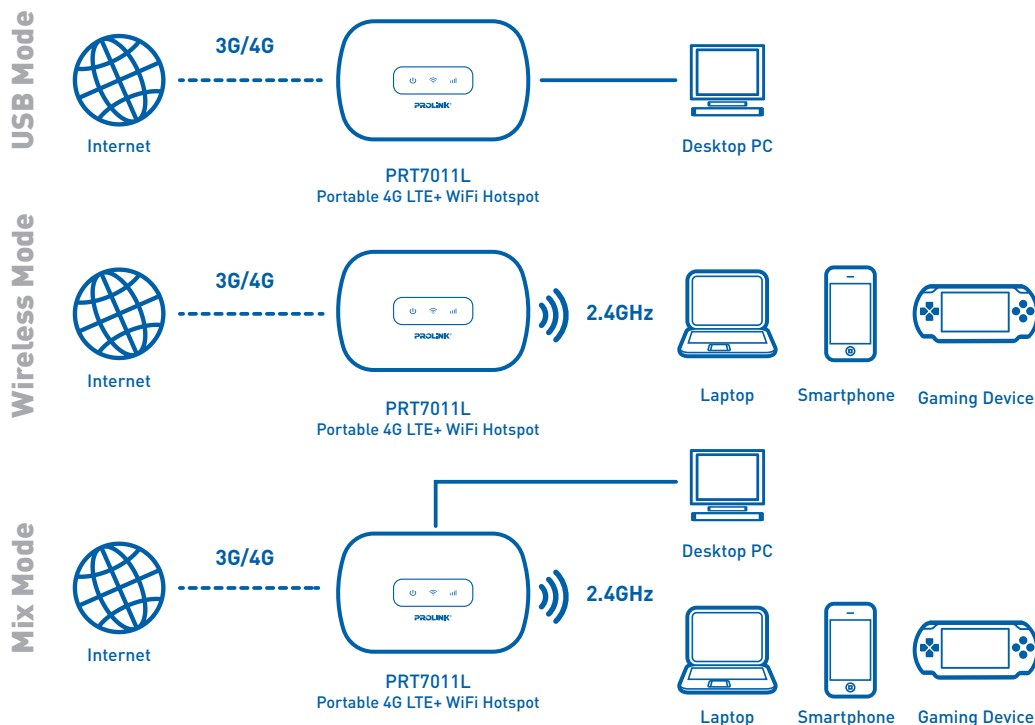

Check 3G/4G network frequency compatibility for PROLINK® PRT7011L in any country and mobile network carrier: <http://prolink2u.com/check4g/>

Authorised Distributor/ Reseller:



System Requirements:
Windows XP/Vista/7/8/10, Mac*
*Support for Intel-based Mac only

PROLINK® is a trademark of Fida International (S) Pte Ltd and is manufactured under its authority. Microsoft®, Windows®, Windows® 98SE/ME/2000/XP/Vista/7/8/10 are either registered trademarks or trademarks of Microsoft Corporation. Mac and the Mac logo are trademarks of Apple, Inc., registered in the U.S. and other countries. Linux® is a registered trademark of Linus Torvalds and Linux penguin "Tux" created by Larry Ewing and The Gimp. All other brands, products, services, logos and company names mentioned herein are trademarks of their respective owners.

All specifications, designs and contents are subjected to changes without prior notice. Images are for demonstration and may vary from actual products. © Copyright 2017. PROLINK® All rights reserved.

