


PROLiNK®

www.prolink2u.com

Your Inspirations.
Our Innovations.



PPB1002 energiepak Fusion Power Bank





The **PROLiNK® PPB1002** comes with dual charging ports which include both Quick Charge 3.0 and USB Type-C, giving users the best of both worlds when charging their latest smart devices. On top of that, its USB Type-C port supports Power Delivery (PD) capable of providing optimized rapid charging of up to 18W for all compatible USB-C devices.

This new addition to the PROLiNK power bank series also feature the pass-through charging technology, letting users to simultaneously charge the power bank and a connected device.


With a total battery capacity of 10,000mAh, the power bank comes with a digital LED power indicator to show the actual percentage of the remaining battery charge in real-time. The Advanced Protection Technology also ensures that your device is fully protected from over-current, over-voltage, over-discharge and even short circuits.

- Sleek, classic and compact design
- Qualcomm Quick Charge 3.0 for quicker and efficient charging
- USB Type-C PD3.0 (Power Delivery) port offers rapid charging (Output) and recharging (Input) speed
- Dual ports for simultaneous charging
- Digital Power Indicator to show battery status
- Premium Lithium-Polymer Batteries for longer usage life
- Advanced Protection Technology (Over-charge, over-discharge, over-current and short circuit)
- Pass-through charging feature allows the power bank to recharge and charge connected devices at the same time
- Safety Cert: IEC 62133 (Battery) / 60950-1 (Power Bank)

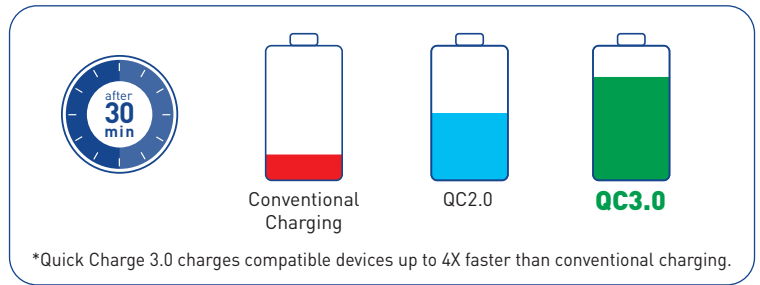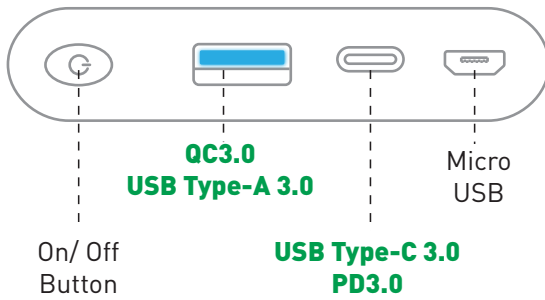

Power Delivery

Optimized rapid charging of up to 18W for all compatible USB-C devices

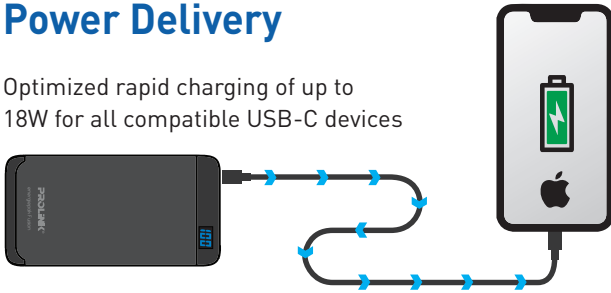

Safety Certifications



Complies with following IEC Safety Standards

- IEC 62133 (Battery)
- IEC 60950-1 (Power Bank)



PRODUCT LIABILITY INSURANCE

Insured by NTUC Income Insurance Co-operative Ltd ("Insurer"), with a worldwide coverage (excluding the United States and Canada), and a product liability coverage of up to SGD\$1,000,000

- Fida International (S) Pte Ltd shall submit all claims to the Insurer for assessment on the merits of the case
- Claimant will be notified by Fida International (S) Pte Ltd and/or the Insurer on the success of the claim in due course

Specifications

Dimension	140mm * 72mm * 15mm	
Weight	218.9g	
Battery	Type	Lithium-Polymer
	Capacity	10,000mAh
	Recharge	≤ 5 hours (with 5V/2A Micro USB) ≤ 3.5 hours (with 9V/2A USB-C)
Input	Micro USB	5V / 2A
	USB-C	5V / 2A, 9V/ 2A
Output 1 & 2	USB Type-C 3.0 PD 3.0	5V/3A, 9V/2A, 12V/1.5A(Max)
	USB Type A	5V/3A, 9V/2A, 12V/1.5A(Max)
	Quick Charge 3.0	
Indicators	Digital Power Indicator	
Advanced Protection Technology	Over-Charge Protection	✓
	Over-Discharge Protection	✓
	Over Current Protection	✓
	Short Circuit Protection	✓
Operating Temperature	-5°C ~ + 55°C	
Discharging Temperature	-10°C ~ +60°C	
Storage Temperature	-20°C ~ +60°C	

Authorised Distributor/ Reseller:



System Requirements:
Android 2.2 & above, iOS 8.0 & above